



**Product Brochure**





# ZAMMIT

## Contents

<b>Roofing &amp; Wall Cladding</b>	3
- Rapid Deck Roof Sheets	4
- Rapid Corrie Roof Sheets	5
- Rapid Seam	6
- Custom Flashing	7
- Colourbond Range	8
<b>Insulated Roofing Products</b>	9
- Spacemaker	10
- Corrolink S 1000	11
<b>Polycarb / Fibreglass &amp; Twin Wall</b>	12
<b>Skylights</b>	16
<b>Gutter Protection</b>	19
<b>Rainwater Goods</b>	27
<b>Home Improvements</b>	36
<b>Accessories</b>	43

Zammit Metal Roofing Products has been manufacturing & supplying the Sydney metal roofing industry for over 35 years.

Zammit Metal Roofing Products is a family owned business founded in 1987. We are an established manufacturer & supplier, specialising in all aspects of metal roofing, custom flashings, engineered aluminium / steel posts & beams, and rainwater goods.

Our experienced team have a wealth of knowledge in all leading market products. We will provide you with expert advice and solutions for all residential & commercial metal roofing projects.

Visit us at 82 Glendenning Road, Glendenning or contact us [sales@zammitroofing.com.au](mailto:sales@zammitroofing.com.au)




# ROOFING AND WALL CLADDING








## Rapid Deck

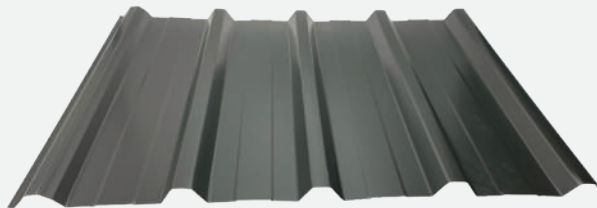

Rapid Deck features a high rib profile with fluted pans, it is available up to 22m lengths making it perfect for both roofing & wall cladding. Rapid Deck is available in a range of colours and can be reversed rolled to have colour underneath.


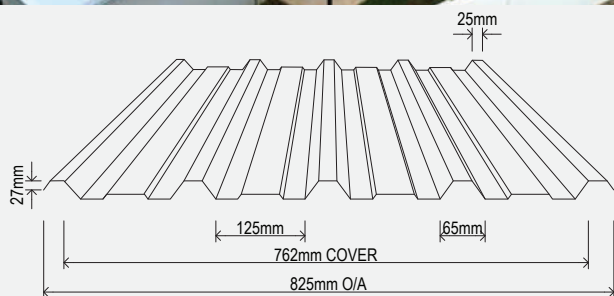


BMT	ROOF SPAN (INT/END)*	MIN PITCH
0.42	1900/1300	2°
0.48	2600/1850	2°



- 762mm Coverage
- 2° Minimum Pitch
- Custom Cut Lengths

**LENGTH** (in mm)  
**MIN:** 500mm  
**MAX:** 20 000mm



### Apron Standard




### Pitch Flashing





### Ridge Cap



### Barge Flashing



### Standard Valley



### Rapid Deck Accessories









CALL OR VISIT OUR  
WEBSITE TO VIEW

**ALL ROOFING  
PROFILES**

## Rapid Corrie

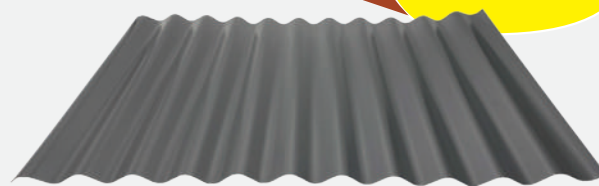

Rapid Corrie is an extremely popular corrugated profile, equally beneficial & stylish for both contemporary & classic style homes. It is available up to 22m lengths making it perfect for both roofing & wall cladding. Rapid Corrie is available in a range of colours and can be reversed rolled to have colour underneath.


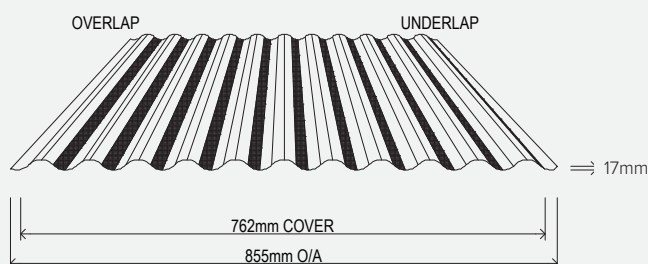


BMT	ROOF SPAN (INT/END)*	MIN PITCH
0.42	1200/900	5°
0.48	1700/1300	5°


- Pricing per lineal metre
- 762mm Coverage
- 5° Minimum Pitch
- Custom Cut Lengths

**LENGTH** (in mm)  
**MIN:** 500mm  
**MAX:** 20 000mm


### Apron Standard





### Apron Standard with Pressure Seal





### Barge Standard




### Pitch Flashing Corrie



### Ridge Cap



### Roll Top Corrie



### Rapid Corrie Accessories




50MM ROOF ZIP



INFILL STRIP



TOP HAT



WOODEN BATTEN




**Rapid Seam**

**NEW  
PRODUCT  
COMING  
SOON**




## Custom Flashings


### Gutters

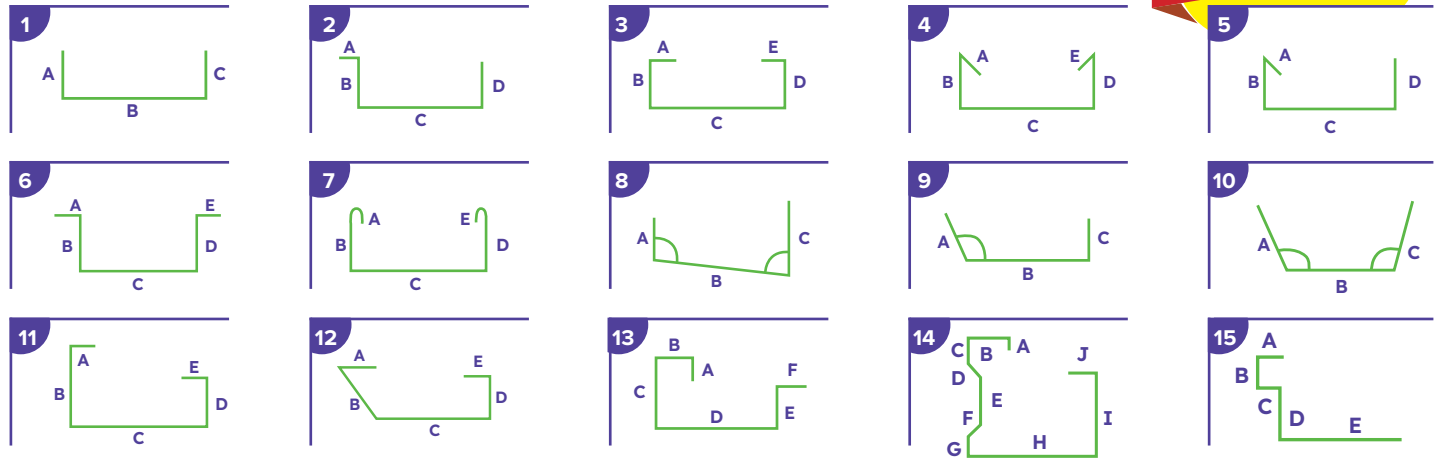


### Cappings

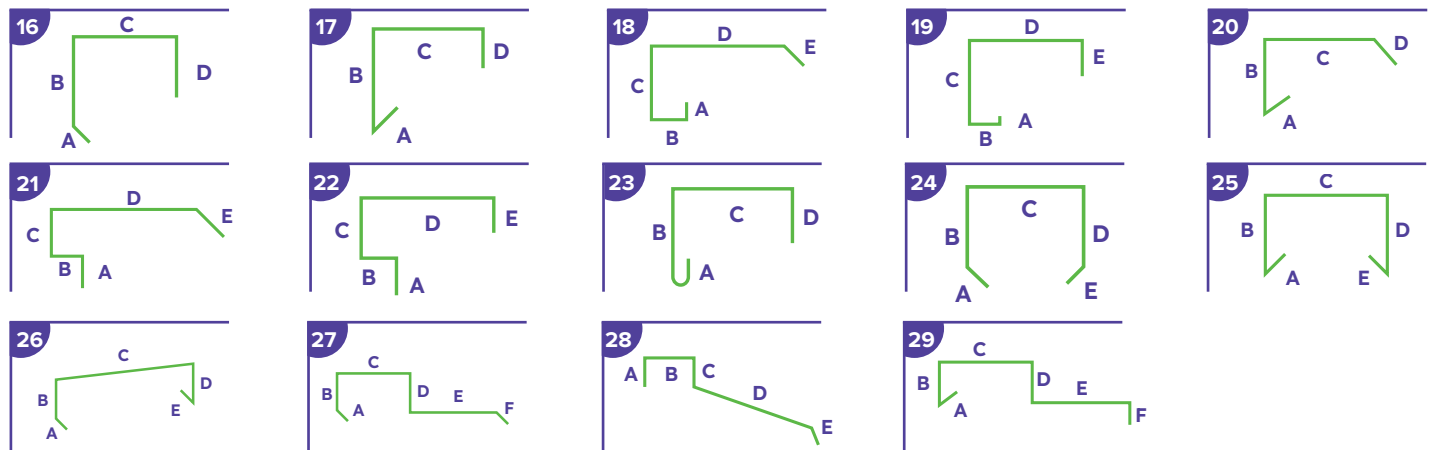

### Common Flashings and Aprons

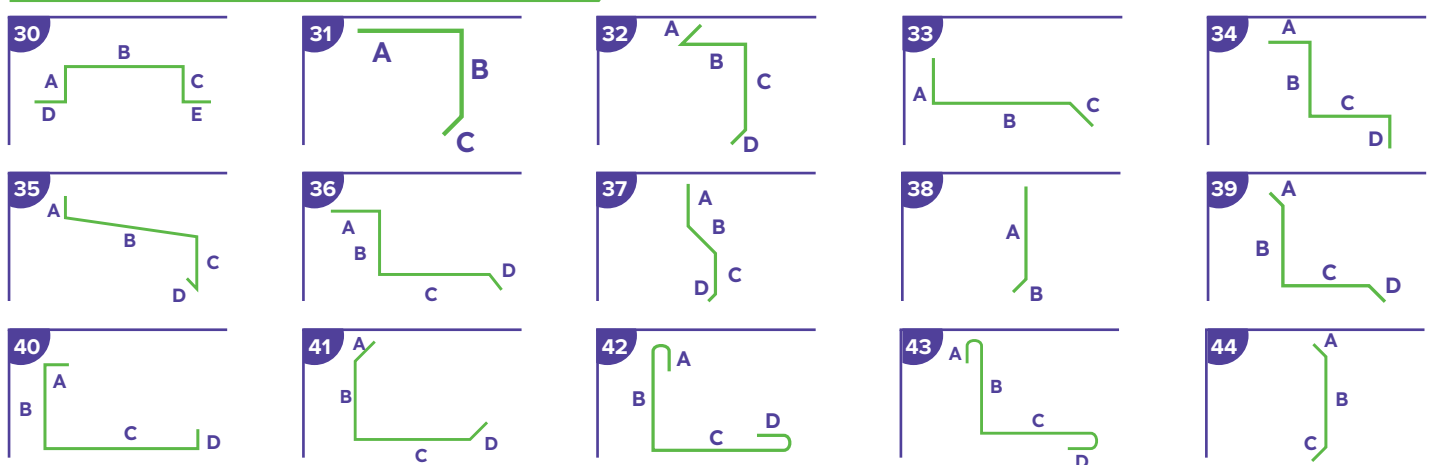

### Others

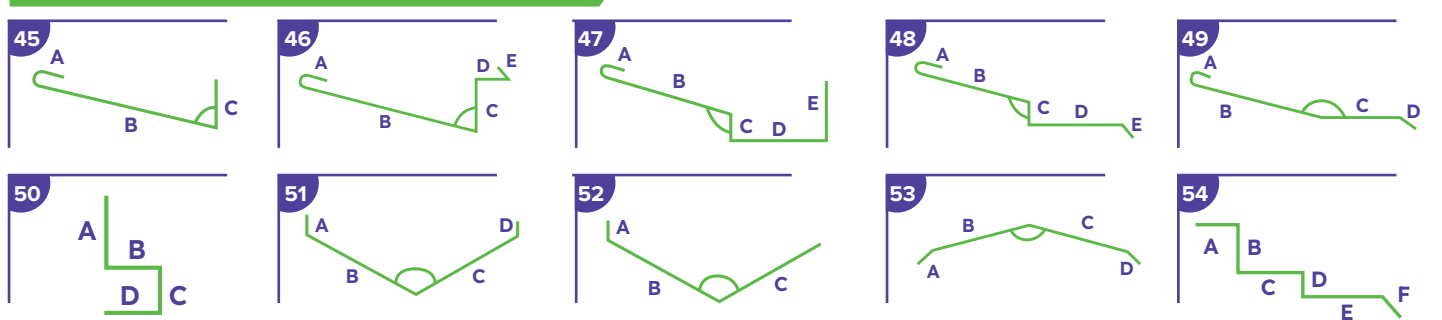



## Colour Swatches

### Colorbond Colour Range



Ironstone




Paperbark



Classic Cream



Evening Haze



Surfmist



Shale Grey



Pale Eucalypt



Dune



Woodland Grey



Windspray



Gully



Deep Ocean



Cottage Green



Wallaby



Jasper




Basalt




Manor Red




Monument




Night Sky



Dover White



Bluegum



Southerly




# INSULATED ROOFING PRODUCTS





## Spacemaker

Only 1 degree pitch & up to 11.4m trafficable free span

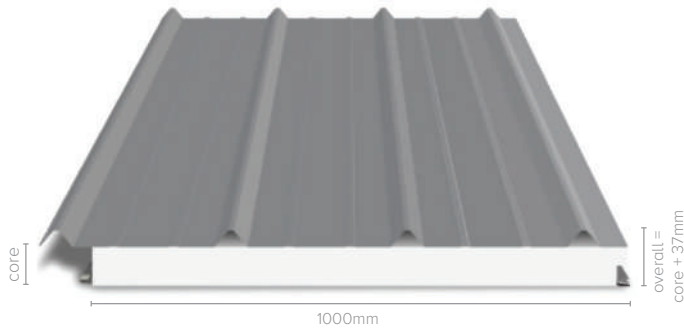

### Key Features & Benefits

- Minimum roof pitch only **1°** - lowest pitch available
- Our longest trafficable **unsupported span** of up to **11.4m** means less unsightly support beams
- **Maximum panel length of 15.0m**
- Lightweight and easy to install
- Wiring services run through core duct
- Custom 37mm high trapezoidal profile
- Fire retardant EPS insulated core dramatically reduces radiant heat transfer, mould and condensation
- **Fire flashings** available to suit up to BAL 40
- **LED downlights** and **ceiling fan mounting plates** available
- Solar panel installation engineering
- **Skylight strips** now available in kits
- Side eave overhang up to 450mm based on full width panel. **Cantilever** distance up to **2.85m**
- Ceiling surface available in **Smooth, Micraline, Luxline** or **Embossed** in colours as shown.

Spacemaker Span Table

Wind Class in accordance with AS4055-2012	Panel Size	Maximum Single Span		
		Fully Enclosed Room	One Side Open	Two/Three Sides Open
N1 (W28N)	50mm	7039	6533	7039
	75mm	8557	7716	8557
	100mm	9367	8508	9367
	125mm	10508	9475	10508
	150mm	11407	10285	11407
N2 (W33N)	50mm	6275	5690	6275
	75mm	7123	6459	7123
	100mm	7853	7121	7853
	125mm	8746	7931	8746
	150mm	9494	8609	9494
N3 (W41N)	50mm	4939	4487	4939
	75mm	5606	5093	5606
	100mm	6181	5616	6181
	125mm	6883	6254	6883
	150mm	7473	6789	7473
Other wind classes	N4 (W50N) - C1 (W41C) - C2 (W50C) - C3 (W60C)			

In accordance with Wind actions: AS/NZS 1170.2:2011 - Clause 5.3, 5.4 and D4; AS 4055-2012. Imposed load on roof: AS/NZS 1170.1:2002 - Clause 3.5

Cantilever ability of the panel is 25% of the maximum allowable span, provided there is double the desired cantilever as a backspan. Maximum side eave achievable is 450mm, based on using a full width panel. Fixing Details: Fixed to support member with 14g self drilling screws at every crest. Typically 3 screws to each panel, at each support. Request engineering specs for more information.

### Spacemaker Specifications

Width	Length (Cut to Order)	Min. Roof Pitch
1000mm Cover	<b>Min: 1800mm</b> <b>Max: 15000mm</b>	1°

Spacemaker only available with Left Hand Lap and 60mm gutter cutback configuration

### Roof Colour Range (Lower skin 0.5mm G300 Steel)

<b>Off White</b> (*Surfmist)	<b>Smooth Cream</b> (*Classic Cream)	<b>Merino</b> (*Paperbark)	<b>Dusk</b> (*Evening Haze) *Min. 50LM
<b>Gulf</b> (*Gully) *Min. 50LM	<b>Basal</b> (*Basalt)	<b>Jasmin Brown</b> (*Jasper)	<b>Slate Grey</b> (*Woodland Grey)
<b>Gull Grey</b> (*Shale Grey)	<b>Birch Grey</b> (*Dune)	<b>Armour Grey</b> (*Windspray)	<b>Wallaroo</b> (*Wallaby) *Min. 50LM
<b>Mist Green</b> (*Pale Eucalypt)	<b>Heritage Red</b> (*Manor Red)	<b>Unizinc</b> (Zincalume®) *Min. 50LM	<b>Caulfield Green</b> (*Cottage Green) *Min. 50LM • Ltd Warranty
<b>Mountain Blue</b> (*Deep Ocean) *Min. 50LM • Ltd Warranty	<b>Iron Grey</b> (*Ironstone) • Limited Warranty	<b>Monolith</b> (*Monument) • Limited Warranty	<b>Ebony</b> (*Night Sky) *Min. 50LM • Ltd Warranty

\* Equivalent colour names are trademarks of BlueScope Steel Limited and used only for comparison. Colour swatches are provided as an indication of colour only and may not be an actual representation of colour.

We recommend checking your chosen colour against an actual sample of the product before purchasing.

- Limited Warranty applies to these dark colours.

### Ceiling Colour & Finish Options (Lower skin 0.5mm G300 Steel)

#### Ceiling Colours

<b>Pearl White</b> • Smooth • Embossed • Micraline • Luxline	<b>Cream</b> • Smooth • Micraline • Luxline	<b>Merino</b> • Smooth • Micraline • Luxline

#### Ceiling Finishes


(NB: Images darkened to show textures)

#### Ceiling Finishes (NB: Images darkened to show textures)

<b>Smooth</b>	<b>Embossed</b>	<b>Micraline</b> (Now available on Spacemaker)	<b>Luxline</b> (New planked look finish)

## Corrolink S 1000

Only 1 degree pitch & up to 11.4m trafficable free span

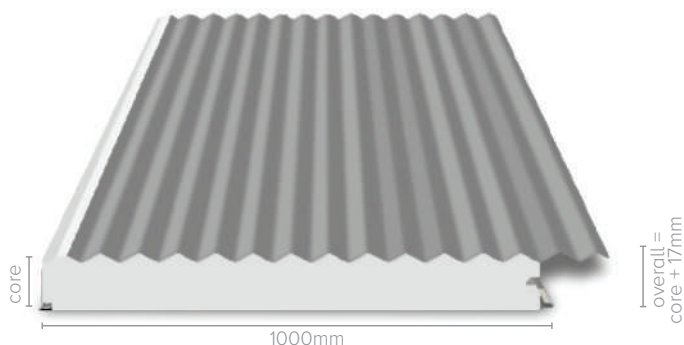

### Key Features & Benefits

- Minimum roof pitch only 3°
- Long trafficable **unsupported span** of up to **10.0m** means less unsightly support beams
- Lightweight and easy to install
- Wiring services run through core ducts
- Fire retardant EPS insulated core dramatically reduces radiant heat transfer, mould and condensation
- **Fire flashings** available to suit up to BAL 40
- **LED downlights** and **ceiling fan mounting plates** available
- Solar panel installation engineering
- Side eave overhang up to 450mm based on full width panel. **Cantilever** distance up to **2.89m**
- Panels customised to your cutback and lapping specs
- **Skylight strips** now available in kits
- Ceiling surface available in **Smooth, Micraline, Luxline** or **Embossed** in colours as shown.

Corrolink-S (1000) Span Table

Wind Class in accordance with AS4055-2012	Panel Size	Maximum Single Span		
		Fully En-closed Room	One Side Open	Two/Three Sides Open
N1 (W28N)	50mm	7515	6776	7515
	75mm	8958	8077	8958
	100mm	9343	8425	9343
	125mm	9742	8785	9742
	150mm	10000 (10618*)	9574	10000 (10618*)
	180mm	10000 (11579*)	10000 (10441*)	10000 (11579*)
N2 (W33N)	50mm	6255	5672	6255
	75mm	7456	6761	7456
	100mm	7777	7052	7777
	125mm	8109	7353	8109
	150mm	8832	8014	8832
	180mm	9638	8739	9638
N3 (W41N)	50mm	4923	4473	4923
	75mm	5870	5335	5870
	100mm	6121	5561	6121
	125mm	6400	5810	6400
	150mm	6956	6320	6956
	180mm	7585	6892	7585
Other wind classes	N4 (W50N) - C1 (W41C) - C2 (W50C) - C3 (W60C)			

In accordance with Wind actions: AS/NZS 1170.2:2011 - Clause 5.3, 5.4 and D4; Imposed load on roof: AS/NZS 1170.1:2002 - Clause 3.5

\*Maximum manufactured ceiling length = 10000mm.

Maximum engineered spans used for cantilever lengths; cantilever ability of the panel is 25% of the maximum allowable span, provided there is double the desired cantilever as a backspan.

Maximum side eave achievable is 450mm, based on using a full width panel. Fixing Details: Fixed to support member with 14g self drilling screws at every alternate crest.

Typically 7 screws to each panel, at each support. Request engineering specs for more information.

### Spacemaker Specifications

Width	Length (Cut to Order)	Min. Roof Pitch
1000mm Cover	<b>Min: 1800mm</b> <b>Max: 15000mm</b>	1°

Spacemaker only available with Left Hand Lap and 60mm gutter cutback configuration

### Roof Colour Range (Lower skin 0.5mm G300 Steel)

<b>Off White</b> (*Surfmist)	<b>Smooth Cream</b> (*Classic Cream)	<b>Merino</b> (*Paperbark)	<b>Dusk</b> (*Evening Haze) *Min. 50LM
<b>Gulf</b> (*Gully) *Min. 50LM	<b>Basal</b> (*Basalt)	<b>Jasmin Brown</b> (*Jasper)	<b>Slate Grey</b> (*Woodland Grey)
<b>Gull Grey</b> (*Shale Grey)	<b>Birch Grey</b> (*Dune)	<b>Armour Grey</b> (*Windspray)	<b>Wallaroo</b> (*Wallaby) *Min. 50LM
<b>Mist Green</b> (*Pale Eucalypt)	<b>Heritage Red</b> (*Manor Red)	<b>Unizinc</b> (Zincalume®) *Min. 50LM	<b>Caulfield Green</b> (*Cottage Green) *Min. 50LM • Ltd Warranty
<b>Mountain Blue</b> (*Deep Ocean) *Min. 50LM • Ltd Warranty	<b>Iron Grey</b> (*Ironstone) • Limited Warranty	<b>Monolith</b> (*Monument) • Limited Warranty	<b>Ebony</b> (*Night Sky) *Min. 50LM • Ltd Warranty

\* Equivalent colour names are trademarks of BlueScope Steel Limited and used only for comparison. Colour swatches are provided as an indication of colour only and may not be an actual representation of colour.

We recommend checking your chosen colour against an actual sample of the product before purchasing.

- Limited Warranty applies to these dark colours.

### Ceiling Colour & Finish Options (Lower skin 0.5mm G300 Steel)

#### Ceiling Colours

			ALL finishes are for illustration purposes only. For true representation please request a colour swatch.
<b>Pearl White</b> • Smooth • Embossed • Micraline • Luxline	<b>Cream</b> • Smooth • Micraline • Luxline	<b>Merino</b> • Smooth • Micraline • Luxline	

### MagnaFlow™ Corrosion Resistant Top & Ceiling Options

			Additional linear metre fees apply for MagnaFlow™ colours. • Only available in MagnaFlow™ top skin/ceiling skin combinations as shown to left.
<b>Off White</b> †	<b>Armour Grey</b> †	<b>Off White</b> † • Smooth • Micraline • Luxline	

### Ceiling Finishes (NB: Images darkened to show textures)

<b>Smooth</b>	<b>Embossed</b>	<b>Micraline</b> (Now available on Spacemaker)	<b>Luxline</b> (New planked look finish)	<b>Luxline Golden Oak</b> † Planked timber effect finish

† Additional linear metre fees apply for woodgrain timber effect finishes.


CALL OR VISIT OUR WEBSITE TO VIEW  
**ALL ROOFING PROFILES**




# POLYCARB / FIBREGLASS & TWIN WALL



## Twinwall & Multiwall

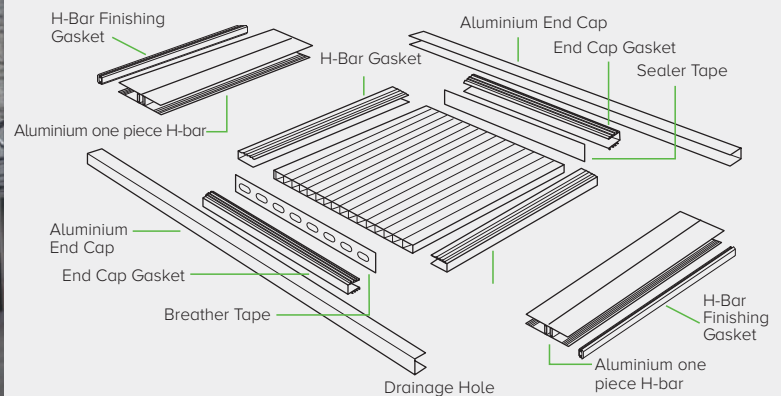

### Standard Colours

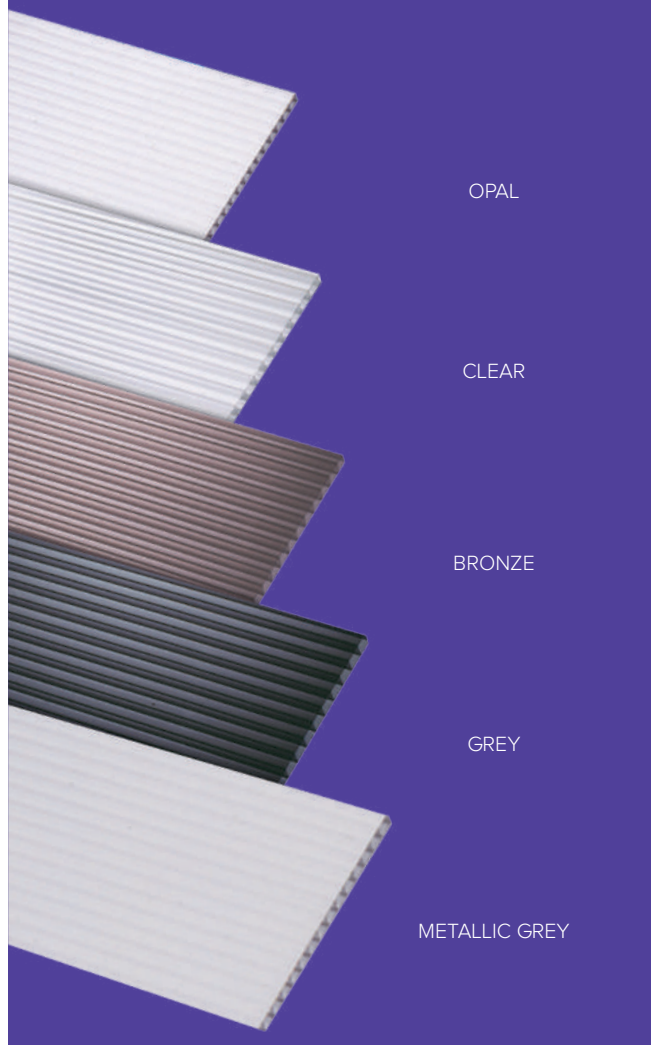

### Sheet Colours, Sizes and Spanning

A MINIMUM OF 5 DEGREE FALL IS REQUIRED

**Colours** 10mm - Clear, Opal, Bronze, Grey, Metallic Grey  
16mm - Clear, Opal

**Widths** 700mm, 1050mm

**Lengths** 2.0m, 2.5m, 3.0m, 3.5m, 4.0m, 4.5m, 5.0m, 5.5m, 6.0m, 7.0m

Other sizes and colours may be available.  
Please confirm availability before ordering.

	700mm		1050mm	
	Rafter	Purlins	Rafter	Purlins
10mm	720mm	not required	1050mm	not required
16mm	720mm	not required	1050mm	not required

Above figures based on 1.5kPa.

For installation in high winds, please contact Zammit Roofing.

### Sheet mass


10mm	1700 gsm	16mm	2700 gsm
------	----------	------	----------

### Available Sheet Structure


Ampelite recommend using standard gauge 10 mm twinwall sheeting for most residential and smaller commercial applications. The 16 mm gauge is often specified for larger projects.

A range of other gauges to suit almost any project are available subject to order quantities. Please consult your nearest Zammit Roofing office for current stock lead time.

### 10mm twin wall Sheet structure



### 16mm twin wall Sheet structure



### Light and Heat Transmission

#### 10mm Twinwall

U-Value: 3.0W/m2k	LT	SHGC
Clear	81%	0.85
Opal	64%	0.71
Bronze	35%	0.55
Grey	20%	0.50
Metallic	16%	0.29

#### 16mm Tripplewall


U-Value: 2.27 W/m2K		
Clear	74%	0.78
Opal	63%	0.69

### Comparison to Glass

	10mm Multiwall	10mm Standard Clear Glass
<b>Thermal U-value</b>	3.0 W/m2k	5.7 W/m2k
<b>Impact Resistance</b>	250	1
<b>UV Resistance</b>	99.90%	0%
<b>Weight</b>	1.7kg/m2	25kg/m2
<b>Sound Insulation</b>	19db	28db



## Solasafe Range

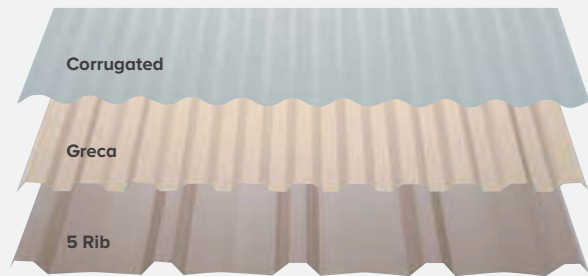

### Level 1

#### CORRUGATED - Colours

Clear, Opal, Grey, Light Bronze, Smooth Cream, Dark Tint.

#### GRECA - Colours

Clear, Opal, Grey, Light Bronze, Smooth Cream, Dark Tint.

#### 5 RIB - Colours

Clear, Opal, Grey, Light Bronze, Dark Tint.

See colour chart, shade factors, light and heat transmission.

#### Sheet cover 760mm.

See table of sheet lengths.

### Level One – SolaSafe Range

Key: 0 = Full Light 10 = Full Shade

The most widely used Solasafe polycarbonate sheet. Six colours with varying light and heat transmission.



#### CLEAR

##### Shade Factor 1


Light Transmission 91%  
Heat Transmission 85.2%



#### LT. BRONZE

##### Shade Factor 3

Light Transmission 36%  
Heat Transmission 60.6%



#### GREY

##### Shade Factor 5

Light Transmission 26%  
Heat Transmission 50%



#### OPAL

##### Shade Factor 7

Light Transmission 55%  
Heat Transmission 40.2%



#### DARK TINT

##### Shade Factor 7

Light Transmission 17%  
Heat Transmission 38.9%



#### SMOOTH CREAM

##### Shade Factor 7

Light Transmission 44%  
Heat Transmission 35.2%

Temperatures in direct sunlight are greater than the temperatures given in weather reports. The shade factors shown provide an indication of the heat absorbed or reflected by the Solasafe sheet.

### Level Two – SolaFrost Range

Key: 0 = Full Light 10 = Full Shade


The SolaFrost range. Low transmitted heat, softer light, more comfort.



#### CLEAR

##### Shade Factor 2

Light Transmission 91%  
Heat Transmission 85.2%



#### GREY

##### Shade Factor 7

Light Transmission 91%  
Heat Transmission 85.2%

Ampelite SolaFrost will significantly reduce the amount of direct sunlight and glare when compared with standard polycarbonate sheeting. This in turn greatly enhances comfort of your outdoor area.

Unlike Level 1 Standard polycarbonate transparent sheeting, Zammit Roofing SolaFrost is a translucent (diffused) polycarbonate product.

This greatly enhances outdoor comfort.

- Translucency = Heat and glare reductions.
- Transparency = Some heat and glare.
- Matt texture helps eliminate expansion noise unlike standard polycarbonate sheeting.

### Level Three – HR1 Range

Key: 0 = Full Light 10 = Full Shade


Solasafe HR1 Heat reducing sheeting. Especially suitable in hot climates.



#### PEARL ICE

##### Shade Factor 6


Light Transmission 87%  
Heat Transmission 85.2%



#### SILVER MIST

##### Shade Factor 7

Light Transmission 27%  
Heat Transmission 49.87%




Light transmission of all colours and grades is determined in accordance with AS/NZS 4257.4. The colour representations of Solasafe polycarbonate above are as accurate as the nature of the material and commercial photographic and printing processes allow. It is probable that colour tints may vary between those shown in this brochure.


Level Three Solasafe HR1 has a metallic finish that reflects the heat and gives soft diffused light.

## Industrial Profiles

### 5 RIB

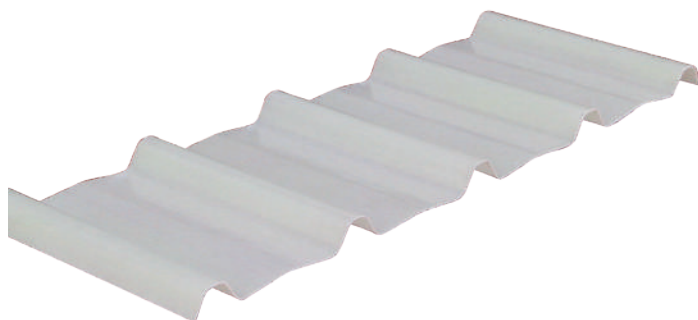


<b>PROFILE NAME:</b>		5-RIB
<b>OTHER NAMES:</b>		APCLAD COWELL DECK HANDEK M-CLAD
<b>COVER:</b>	760	MONOCLAD ROOFDEK STEELCLAD 762 TRIMCLAD TRIMDEK
<b>PITCH:</b>	190	
<b>WIDTH:</b>	820	

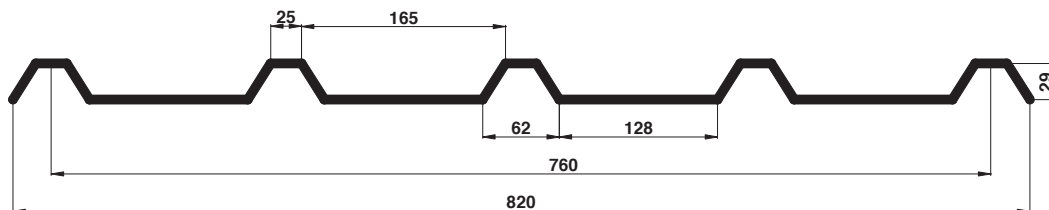


### CORRUGATED




PROFILE NAME:		CORRUGATED
OTHER NAMES:		CORODEK COWELL CUSTOM ORB JET DECK MARATHON ROLEX ROMA
COVER:	760	
PITCH:	76	
NOTES	890	
WIDTH	Double cover COG Dual Roof: 2, 5, 8, 11	

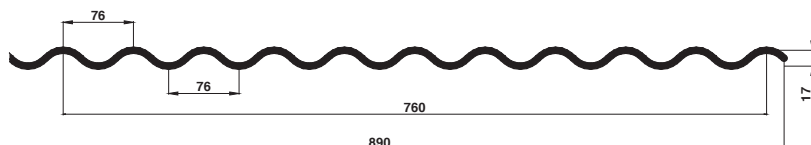

### KLIPIK 700

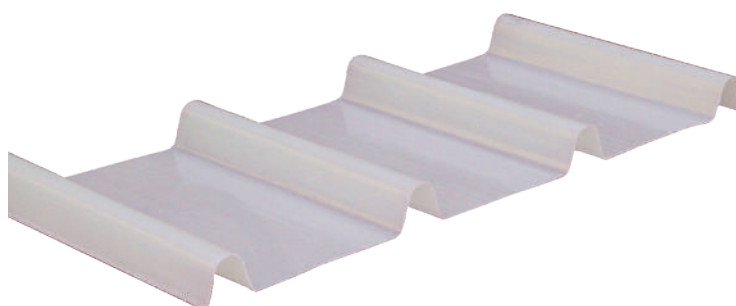

PROFILE NAME:		KLIPILOK 700
OTHER NAMES:		
COVER:	700	
PITCH:	233	
NOTES	760	
WIDTH	MANUFACTURER: BHP	

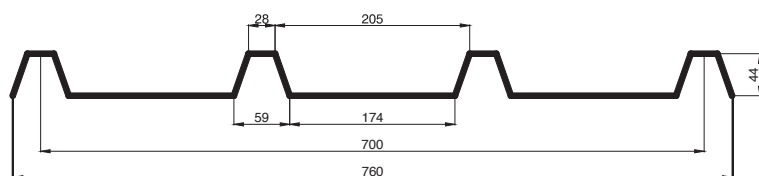



# SKYLIGHTS



## Skylights

### Pitched Solar-Powered Skylights

#### VSE

##### Electronically Operated



- Electrician not required to install.
- White painted interior timber frame and sash.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 10 sizes.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Complete with flashing for corrugated iron or tile roofs.

#### VSS

##### Solar-Powered



#### VS

##### Manually Operated



- Electrician not required to install.
- White painted interior timber frame and sash.
- Smooth profile sits lower in the roof, does not obstruct the roofline.
- Available in 10 sizes.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Complete with flashing for corrugated iron or tile roofs.

#### FS

##### Fixed (non-opening)



### Sun Tunnel

#### TWF

##### Flexible



#### TWR

##### Rigid



- Choice of highly reflective rigid or flexible tunnel (350mm diameter, lengths vary – details on page 15).
- 4mm toughened external glass.
- Dual-layered ceiling diffuser – spreads light over an area of up to 9m<sup>2</sup>.
- Interior diffuser with 'Edge Glow', a clear ring on the diffuser's edge.
- Outer polyurethane cappings with integrated flashings for tiled/corrugated iron roofs.
- 'Stay clean' coating on glass exterior reduces cleaning frequency.
- Easier and quicker to install with VELUX Flexi Loc system. (TWR).

NB: For best performance VELUX recommends TWR for shafts over 1m.

\* Sun Tunnels are not suitable for roof pitches below 15°.

^ Bushfire testing applicable to roof pitches 18°-60°. TWR only.



## Skylights

### Flat Roofs

#### VCS

##### Solar-Powered



- Electrician not required to install.
- Maintenance Free – White PVC interior frame for a tough, hard wearing interior finish.
- Available in 8 sizes.
- Rain sensor automatically closes the skylight when rain is detected.
- High Performance double glazing, with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).

#### VCM


##### Manually Operated



- Maintenance free – White PVC interior frame for a tough interior finish.
- Outer aluminium cappings (grey).
- Available in 7 sizes.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Includes removable insect screen.
- Requires custom-made flashing (not supplied by VELUX).

#### FCM

##### Fixed (non-opening)

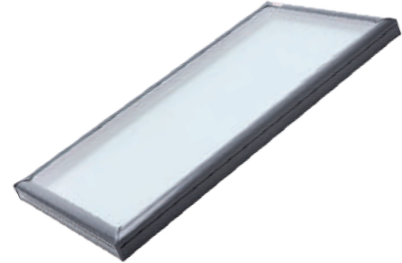

- Unlike acrylic or polycarbonate –laminated glass will not fade nor discolour over time.
- The smooth exterior gives a lower profile on the roof.
- High Performance double glazing as standard; with NEAT™ outer coating: reduces cleaning frequency.
- Approx 99% UV Block.
- Available in 12 sizes.
- Requires custom-made flashing (not supplied by VELUX).
- Versatile positioning\*: most sizes can be used in portrait, landscape or even “diamond shape” orientation.

### Attic Conversations

#### GGL

##### Centre pivot roof window



- A short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Quality white painted pine sash & frame.
- Complete with flashing for corrugated iron or tile roofs.
- Available in 5 sizes.
- Laminated double glazing as standard

#### GPL

##### Dual action roof window



- Opens in two ways: the bottom handle allows for top-hung opening; a short pull on the top control bar allows filtered background ventilation even while the window remains shut.
- A second pull on the control bar allows the window to rotate for maximum ventilation – and up to 180° for cleaning the outer pane from inside the room.
- Quality white painted pine sash & frame.
- Complete with flashing for corrugated iron or tile roofs.
- Available in 5 sizes.
- Laminated double glazing as standard.
- Insect screen available as extra.

### Accessories

#### EDW Flashing


##### For metal or tile roofing



- Flashing for single skylight or roof window.
- Designed for roof pitches from 15° to 90°.
- For roofs below 15° create pitch-up and use custom made flashing (not supplied by VELUX).




# GUTTER PROTECTION

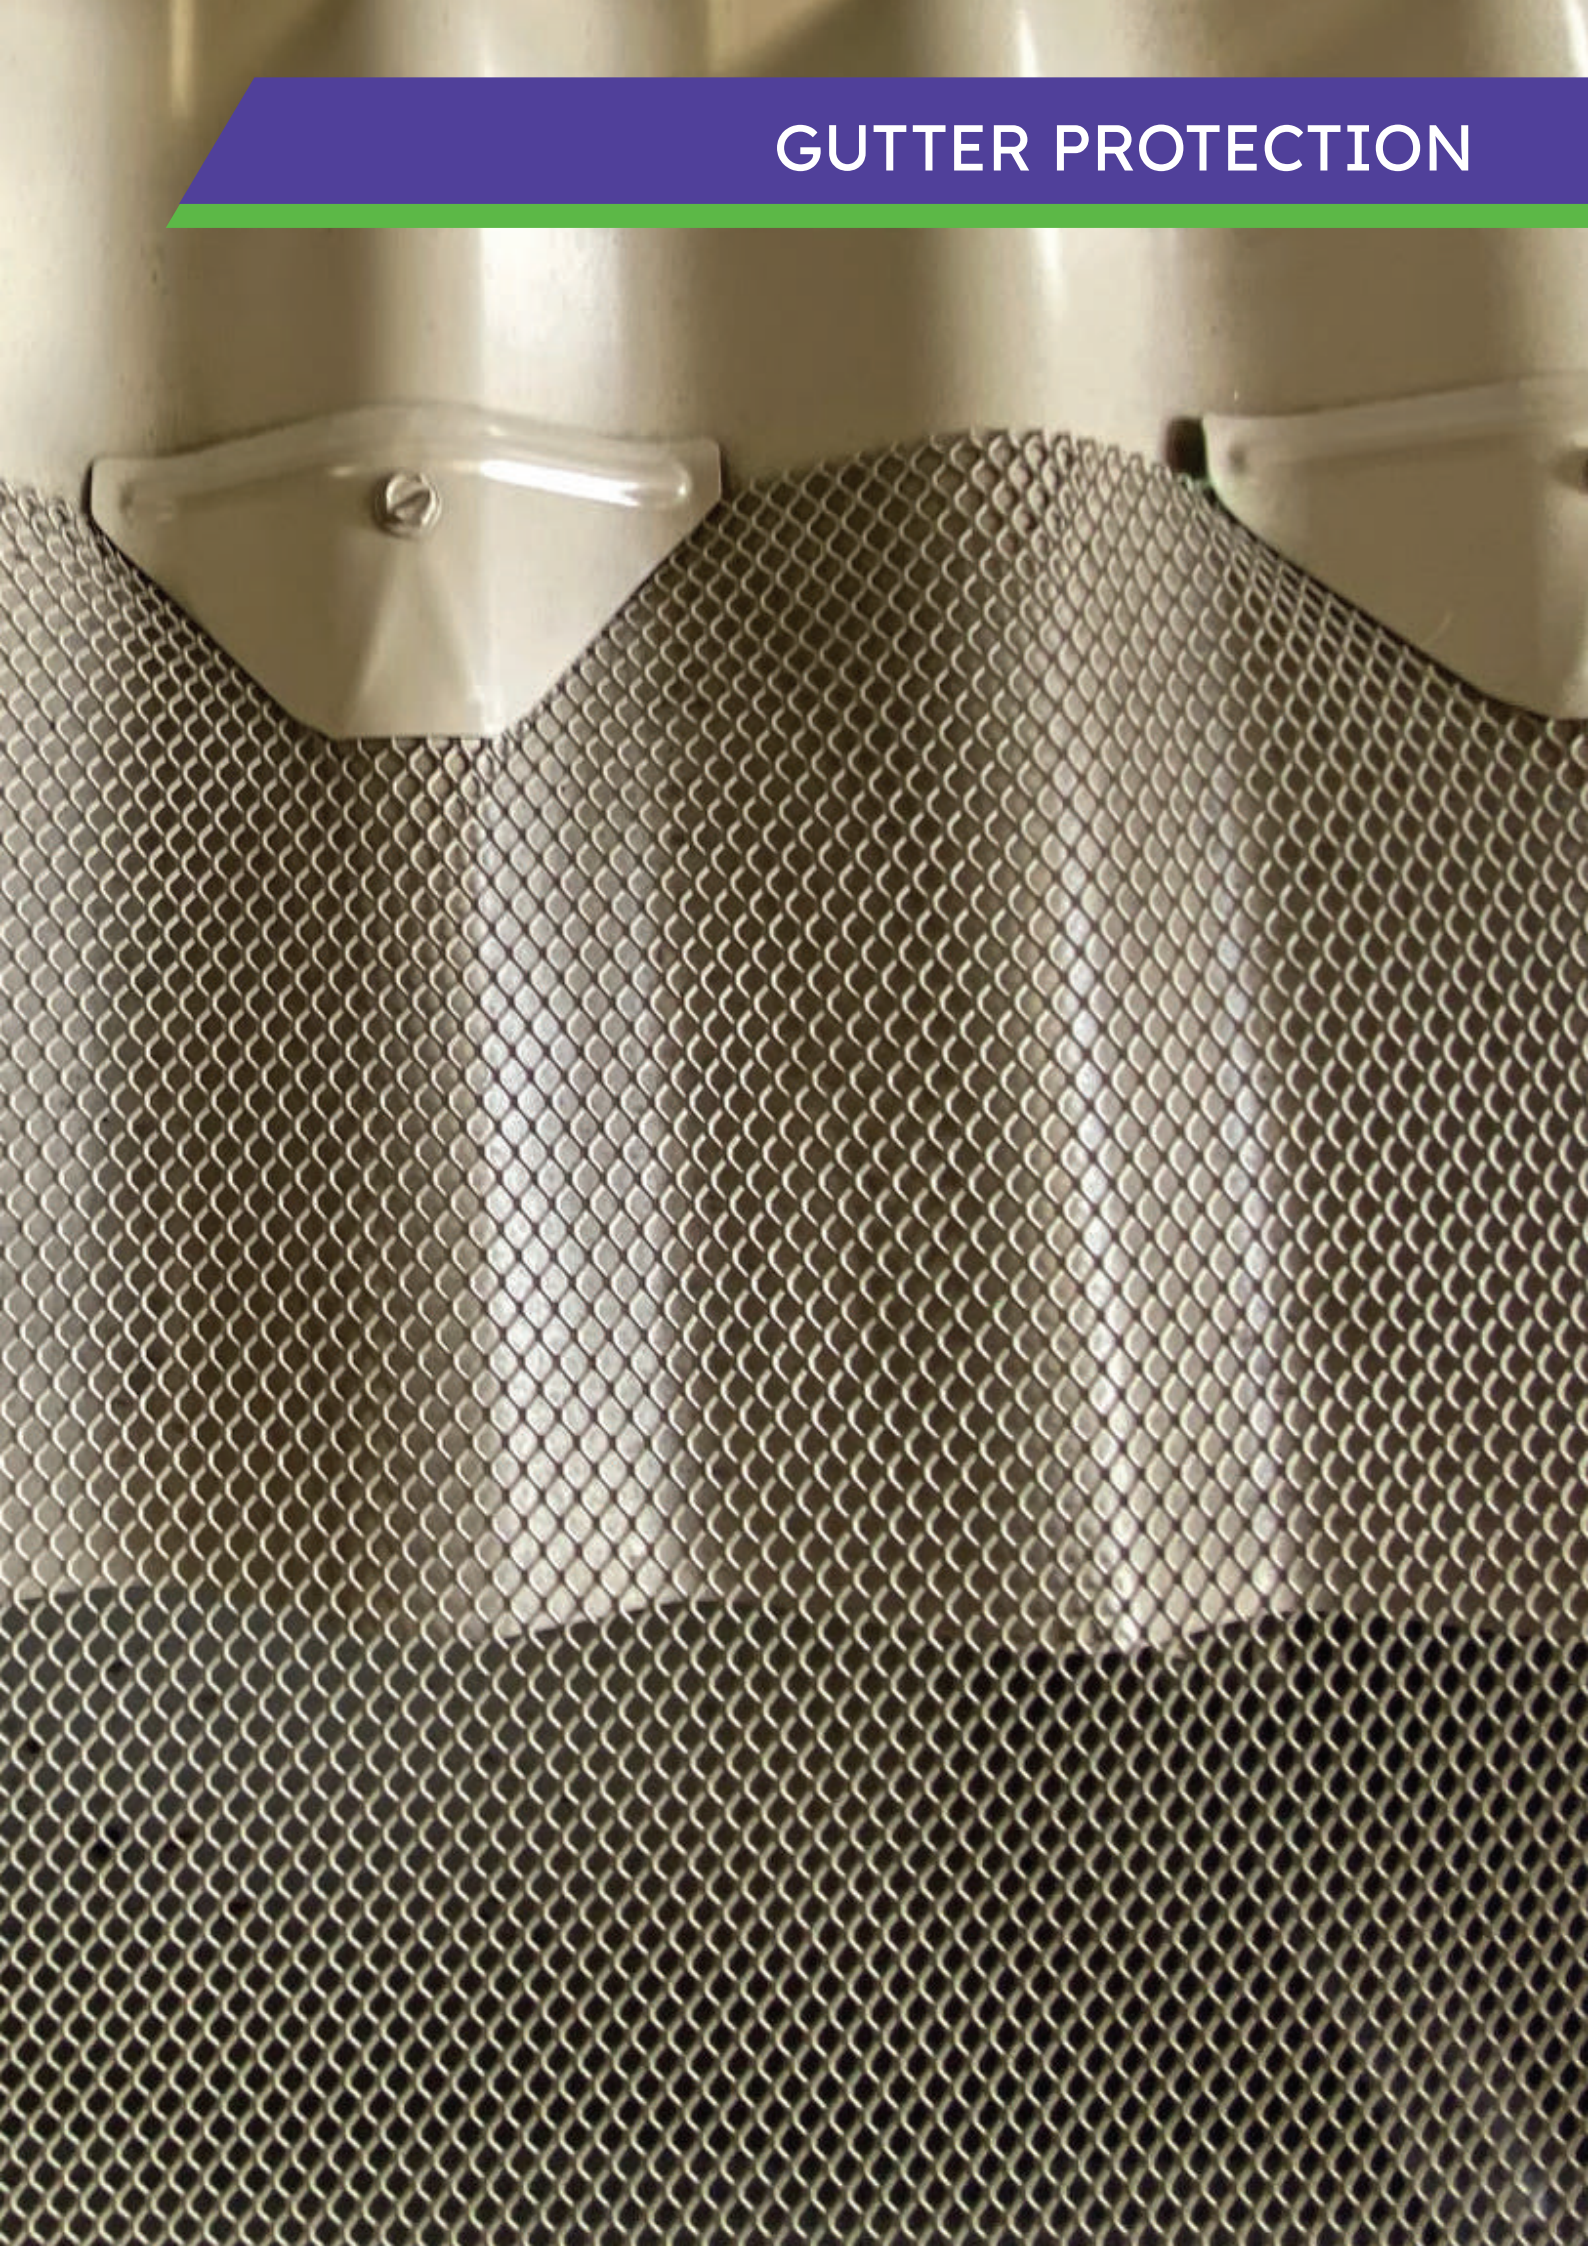



## Trimdek Kit or Rapid Deck


### Gutter Kit

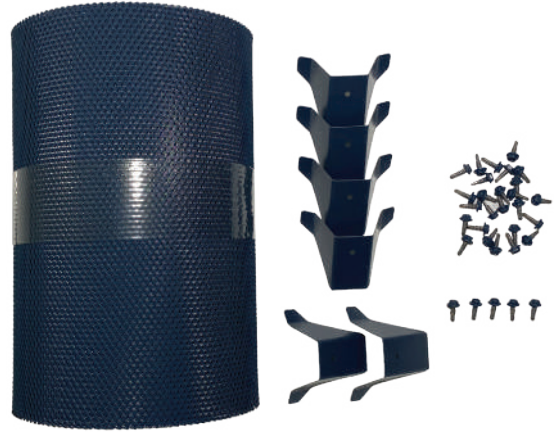

#### Items included

- 250mm Mesh
- Gutter Fixing Trim
- Roof Fixing Saddles
- Screws To Suit

### Valley Kit

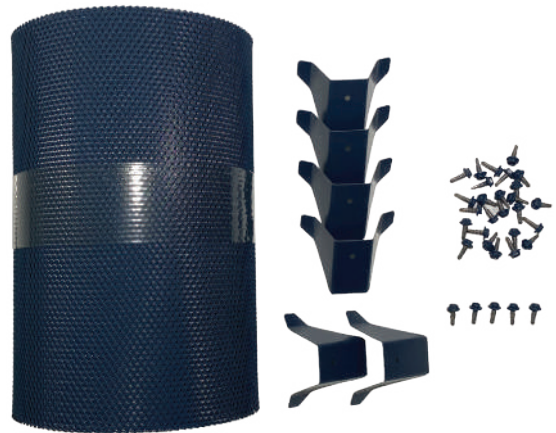

#### Items included


- 250mm Mesh
- Roof Fixing Saddles
- Screws To Suit

**Keep wildlife in nature,  
not in your home**



## Corro Roof Kits


### Gutter Kit

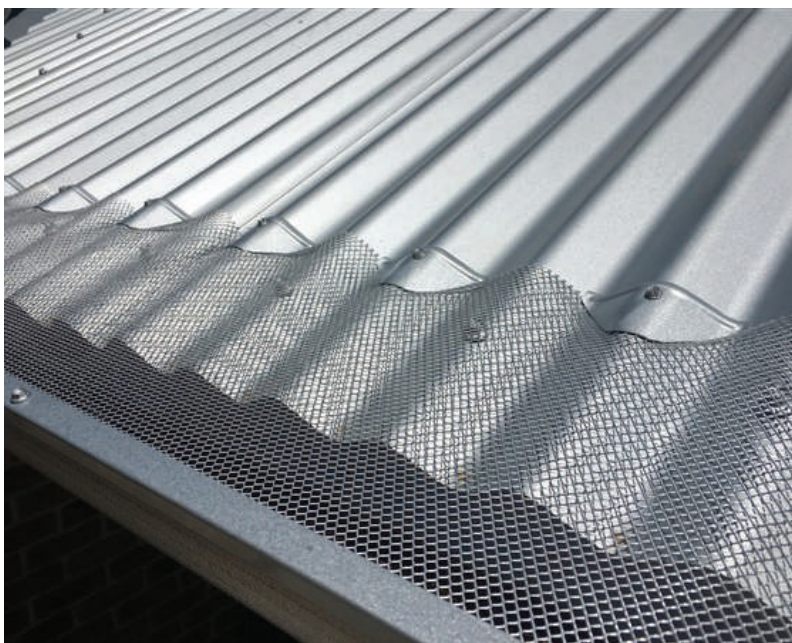

#### Items included

- 250mm Mesh
- Gutter Fixing Trim
- Roof Fixing Saddles
- Screws To Suit

### Valley Kit

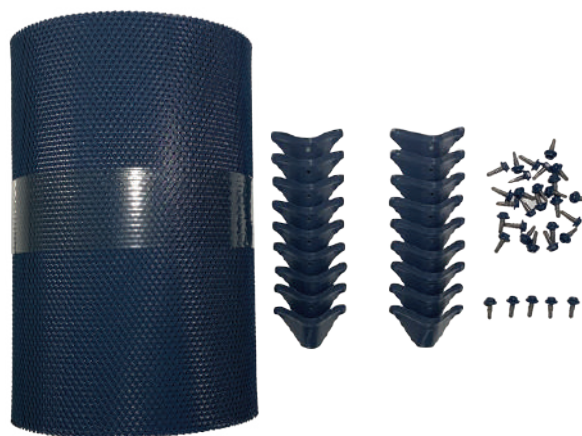

#### Items included


- 250mm Mesh
- Roof Fixing Saddles
- Screws To Suit

**Stop falling leaves  
clogging up your gutter**




## Gutter Mesh Product Range & Specifications


**Premium Aluminium  
Gutter Mesh (500 g/m<sup>2</sup>)**

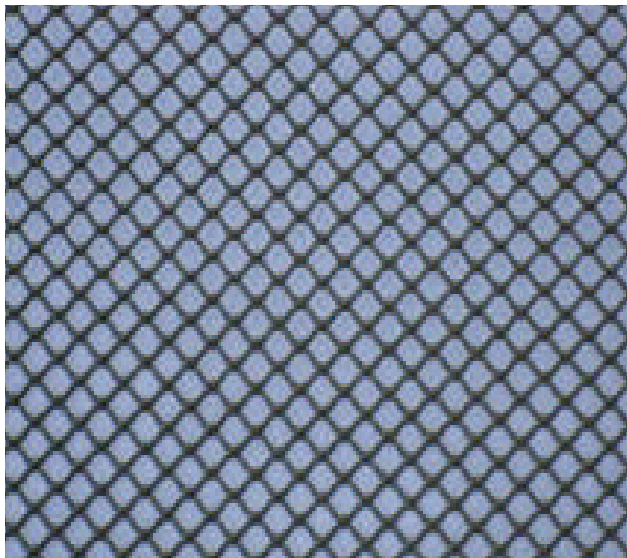


**Woven Aluminium 1.9mm  
Ember Guard**

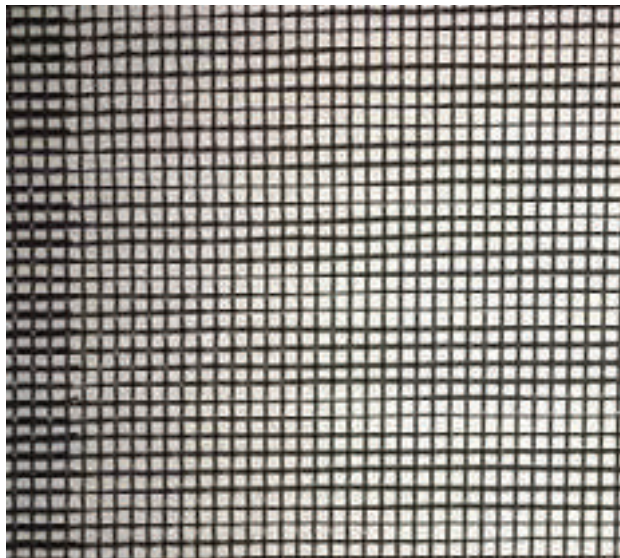

**Heavy Aluminium  
Gutter Mesh (700 g/m<sup>2</sup>)**

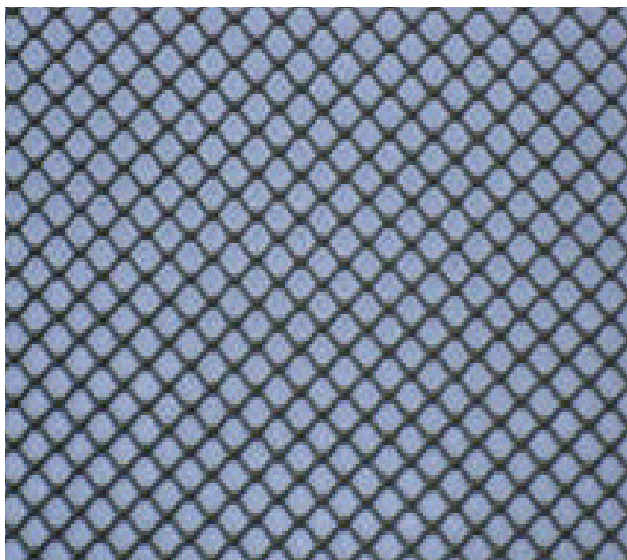

**High Density Poly-Ethylene  
Gutter Mesh**


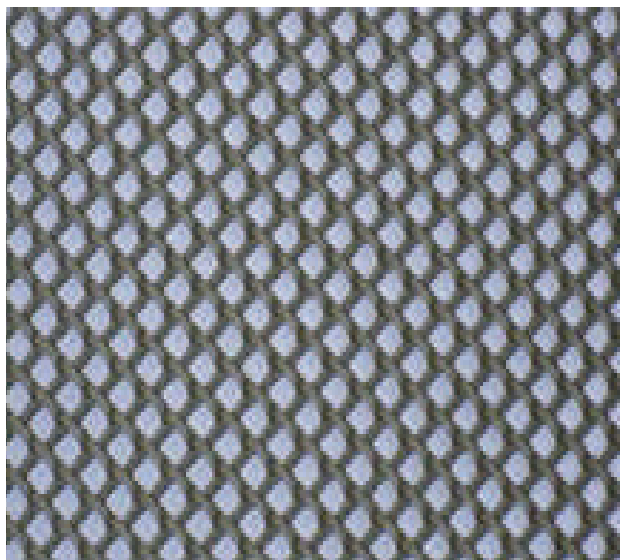


**Keeps nests away  
from your roof**



## Kliplok Kit

### Klip-Lok Kit

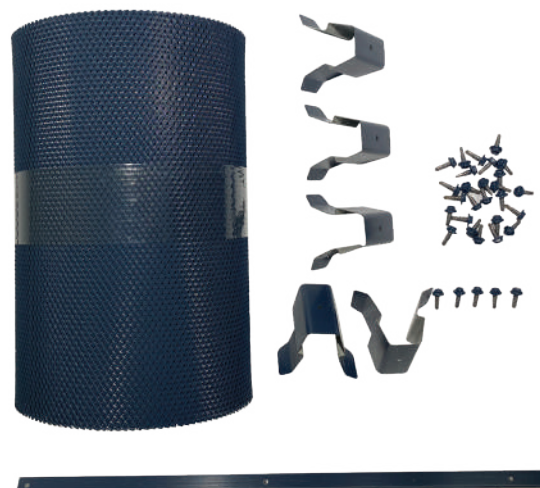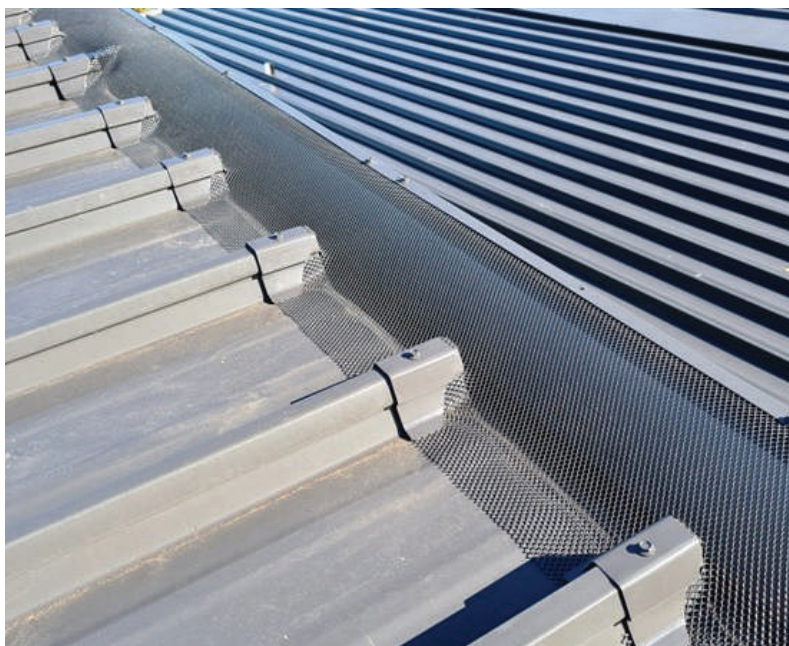

#### Items included

- 250mm Mesh
- Gutter Fixing Trim
- Klip-Lok Saddle
- Screws To Suit

### Box Gutter Kit



#### Items included

- 250mm Mesh
- Roof Fixing Saddles
- Roof Fixing Trim
- Screws To Suit

#### Before



#### After





## Tile Roof Kits

### Gutter Kit



#### Items included

- 500mm Mesh
- Gutter Fixing Trim
- Screws to Suit

### Valley Kit



#### Items included

- 750mm Mesh




























#### Before



#### After



## Mesh Colour Range

		Standard Aluminium 480 g/m2	1.9mm Woven Aluminium 510 g/m2	Heavy Duty Aluminium 700 g/m2	HDPE (Poly) 650 g/m2
	Basalt	✓	✓		
	Classic Cream	✓			
	Cottage Green	✓			✓
	Cove	✓			
	Dark Brown	✓			
	Deep Ocean	✓			
	Dune	✓			
	Evening Haze	✓			
	Gully	✓			
	Headland	✓			
	Ironstone	✓	✓		✓
	Jasper	✓	✓	✓	✓
	Mangrove	✓			
	Monument	✓	✓	✓	✓
	Manor Red	✓	✓	✓	✓
	Night Sky	✓			✓
	Paperbark	✓	✓		✓
	Pale Eucalypt	✓	✓	✓	
	Shale Grey	✓	✓	✓	
	Surfmist	✓	✓	✓	✓
	Terrain	✓			
	Terracotta	✓			✓
	Vincent Brown				✓
	Wallaby	✓			
	Wilderness				✓
	Windspray	✓			
	Woodland Grey	✓	✓	✓	✓
	Mill Finish	✓			





## Summary of Compliance with AS 3959-2018

	Aluminium Gutter Mesh	HDPE (Poly) Gutter Mesh	1.9mm Aperture Aluminium Mesh	1.9 Aperture Stainless Steel Mesh
<b>Base Material</b>	Commercial Grade Aluminium	High Density Poly-Ethylene	Commercial Grade Aluminium	Marine Grade 316 Stainless Steel
<b>Aperture</b>	3mm x 4mm	4.0mm x 4.0mm	1.9mm x 1.9mm	1.9mm x 1.9mm

Suitable as <b>Gutter Guard</b>	✓	✗	✓	✓
BAL-12.5	✓	✗	✓	✓
BAL-19	✓	✗	✓	✓
BAL-29	✓	✗	✓	✓
BAL-40	✓	✗	✓	✓
BAL-FZ	✓	✗	✓	✓

Suitable as <b>Ember Guard</b>				
BAL-12.5	✗	✗	✓	✓
BAL-19	✗	✗	✓	✓
BAL-29	✗	✗	✓	✓
BAL-40	✗	✗	✗	✓
BAL-FZ	✗	✗	✗	✓

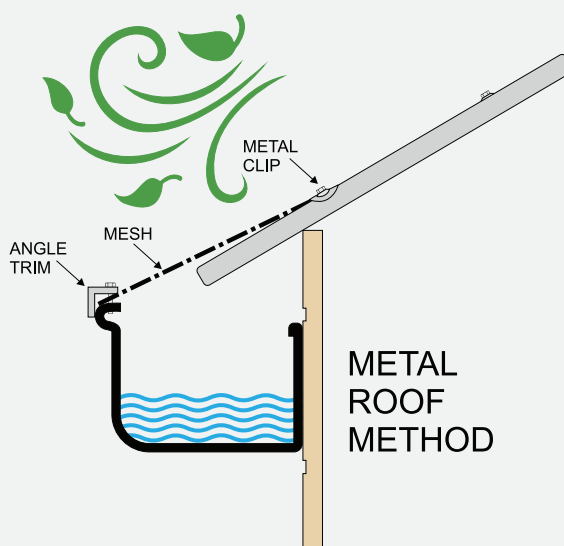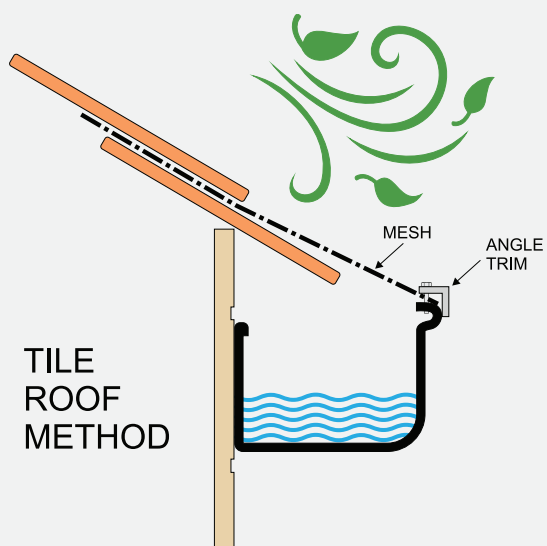

# RAINWATER GOODS






## Ace Quad



### FLOW RATE:

Volume in 1m length 1.5 litres / second.  
6.2 litres measured to overflow holes.  
Available Slotted or Unslotted

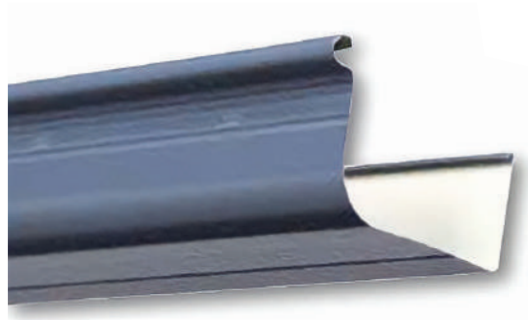

ACE QUAD

ACCESSORIES

## Steel Fascia



STEEL FASCIA

ACCESSORIES

## Fascia Cover



FASCIA COVER

ACCESSORIES



External 90°  
Angle



Internal 90°  
Angle



External 45°  
Angle



Internal 45°  
Angle



External  
Bracket



Right & Left Hand  
Return Stop End




Stop End



Concealed  
Suspension Bracket



Overstrap  
Bracket



Concealed  
Bracket



Timber  
Suspension Clip



Quad Overflow  
Nozzle



Metal Fascia  
Suspension Clip



10mm and 5mm  
Ace Spacer Clip



90° & 45°  
Internal Angles



Internal  
Straight Joiner



Barge  
Moulds



90° Barge  
Rafter Bracket



External 45°  
Angle



External 90°  
Angle



Erection  
Bracket



Barge Apex Cover



Metal Fascia  
Suspension Clip



Barge Rafter  
Bracket



45° Hip Rafter  
Bracket



Standard Rafter  
Bracket



Steel Frame  
Bracket



90° & 45°  
Internal Angles



External 90°  
Angle



Internal  
Straight Joiner



External 45°  
Angle



## Half Round



### FLOW RATE:

Volume in 1m length with overflow holes 1.5 litres / second.  
2.5 litres / second without overflow holes.  
6.48 litres measured to overflow holes.  
7.16 litres measured to back of gutter.



HALF ROUND


ACCESSORIES

## Roundline



### FLOW RATE:

Volume in 1m length with overflow holes 1.5 litres / second.  
2.5 litres / second without overflow holes.  
6.32 litres measured to overflow holes.  
7 litres measured to back of gutter.

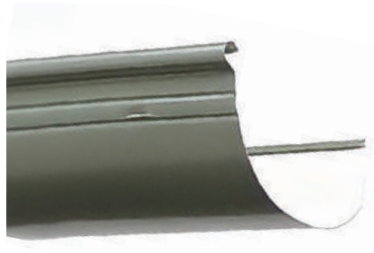

ROUNDLINE

ACCESSORIES

## Nu-Line



### FLOW RATE:

Volume in 1m length 5 litres / second.  
12.6 litres measured to overflow holes.



NU-LINE

ACCESSORIES



External 90°  
Angle



Internal 90°  
Angle



External 45°  
Angle



Internal 45°  
Angle



Stop End



Half Round Overflow  
Nozzle 90mm  
100x50mm/100x75mm



External Bracket  
(colour screws supplied)



Angle Cutting Template



100 x 50mm Nozzle



90mm Round  
Nozzle



100 x 75mm  
Nozzle



External 90°  
Angle



Internal 90°  
Angle



External 45°  
Angle



Internal 45°  
Angle



Concealed Suspension  
Bracket



Overstrap  
Bracket



Timber Fascia  
Suspension Clip



Stop End



Metal Fascia  
Suspension Clip



90mm Round  
Nozzle



100mm x 50mm  
Nozzle



100mm x 75mm  
Nozzle



Round Overflow  
Nozzle 90mm  
100x50mm/100x75mm



Angle Cutting  
Template



External  
90° Angle



Internal  
90° Angle



Straight  
Joiner



No 1 External  
Bracket



Stop End



Concealed  
Bracket



Bead & Rafter  
Bracket



Metal Roof  
Bracket



## Mini-Line



### FLOW RATE:

Volume in 1m length 2.5 litres / second.  
7.3 litres measured to overflow holes.



MINI-LINE  
ACCESSORIES

## 90mm Round Downpipe



### FLOW RATE:

90mm Round Downpipe  
Volume in 1.8m length 11.44 litres.  
Flow Capacity of 90mm 4.2 litres per second.



90MM ROUND DOWNPIPE  
ACCESSORIES

## Rainwater Heads & Leafguards




### Leafguard Painted 25% Gloss & Plain

Slate Grey, Mountain Blue, Ebony.


### Ace Leaf Diverter® & Rainwater Heads.

All Colours & Plain.

RAINWATER HEADS & LEAFGUARDS  
ACCESSORIES

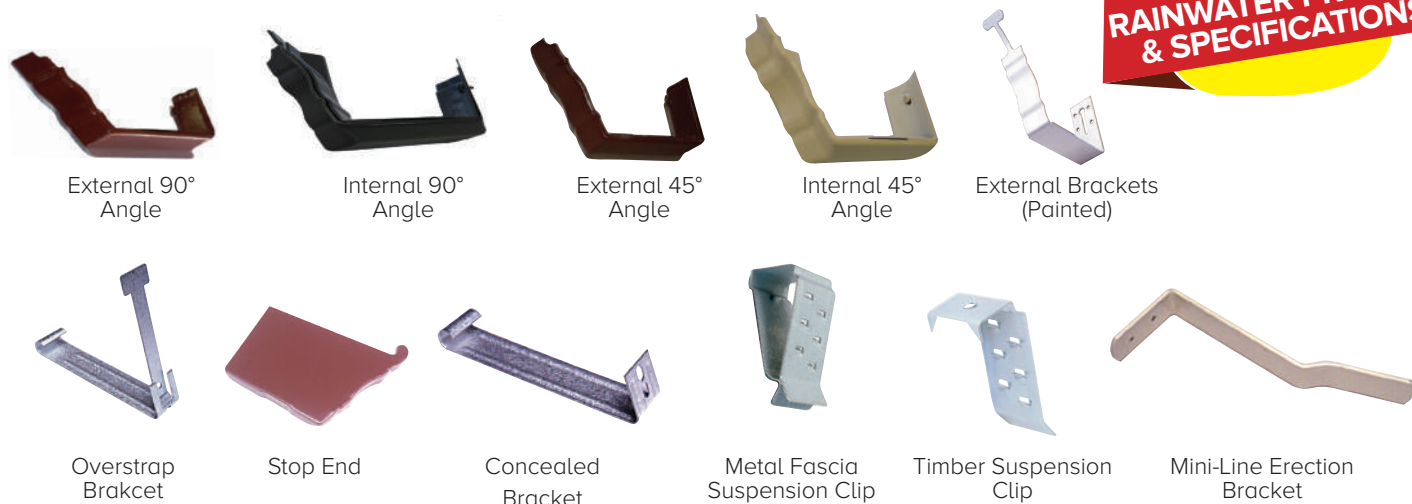

NB: We recommend that plain fittings be painted prior to installation.

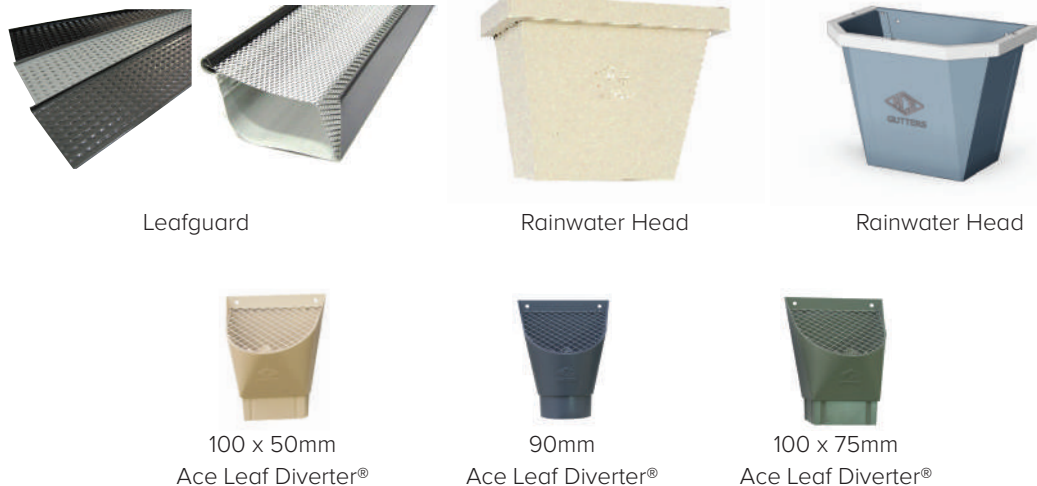




## Square-Line



### FLOW RATE:

Volume in 1m length 5 litres / second.  
12.6 litres measured to overflow holes  
Available slotted or unslotted

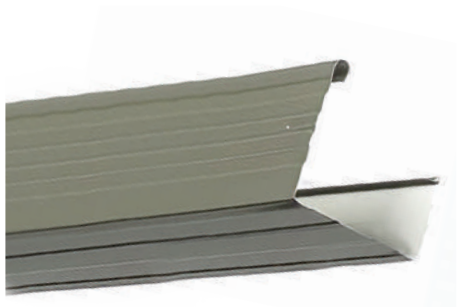

## Rollform Downpipe 100mm x 50mm



### FLOW RATE:

100 x 50mm  
Volume in 1.8m length 9 litres.  
Flow Capacity 3.5 litres per second.



100 x 50mm  
Nozzle



100 x 50mm  
Rollform Astragal



100 x 50mm  
Rollform Offset  
Adjustable



100 x 50mm  
Offset

NB: We recommend that plain fittings be painted prior to installation.

## Rollform Downpipe 100mm x 75mm



### FLOW RATE:

100 x 75mm  
Volume in 1.8m length 13.5 litres.  
Flow Capacity 4.4 litres per second.



100 x 75mm  
Rollform Astragal



100 x 75mm  
Nozzle



100 x 75mm  
Offset




100 x 75mm  
Rollform Offset

NB: We recommend that plain fittings be painted prior to installation.


## Durakote Colour Range



**Gull Grey**




**Brown**  
Roof Sheets not available  
in this colour



**Jasmin Brown**




**Mist Green**



**Caulfield Green**




**Birch**




**Ebony**




**Iron Grey**




**Slate Grey**



**Wallaroo**




**Gulf**




**Heritage Red**



**Basal**



**Armour Grey**



**Monolith**



**Merino**




**Smooth Cream**



**Dusk**



**Off White**



**White**



**Mountain Blue**



# HOME IMPROVEMENTS







# *Comfortable living built for the outdoors*

Zammit Metal Roofing Products stocks a wide range of engineered aluminium / steel products and accessories suitable for your DIY project. Visit our website for our full product range or our display centre for inspiration.

CALL OR VISIT OUR  
WEBSITE TO VIEW

**HOME  
IMPROVEMENT  
RANGE**



## Aluminium



Zammit Metal Roofing Products stocks a wide range of engineered aluminium beams, posts, slats, brackets & accessories to suit. Available in mill finish or powder coated in a range of colours.

Ideal for pergola's awning, privacy screens, bearers & joists & other applications.

### Engineered Aluminium Powder Coated Beam



#### Available Sizes

105mm x 50mm	170mm x 50mm	250mm x 50mm
--------------	--------------	--------------

### Engineered Aluminium Beam - Mill Finish



#### Available Sizes

105mm x 50mm	170mm x 50mm	250mm x 50mm
--------------	--------------	--------------

### Engineered Aluminium Powder Coated Post



#### Available Sizes

90mm x 90mm	150mm x 150mm
-------------	---------------

### Engineered Aluminium Post - Mill Finish



#### Available Sizes

90mm x 90mm	150mm x 150mm
-------------	---------------

### Rounded End Cap

Suitable for Aluminium



#### Available Sizes

105mm x 50mm	170mm x 50mm	-
--------------	--------------	---

## Aluminium

### Z Bracket

Powder coated available to  
colour specification



#### Available Sizes


105mm x 50mm	170mm x 50mm	-
--------------	--------------	---

### Notched Post Connector



#### Available Sizes

90mm x 90mm	150mm x 150mm	-
-------------	---------------	---

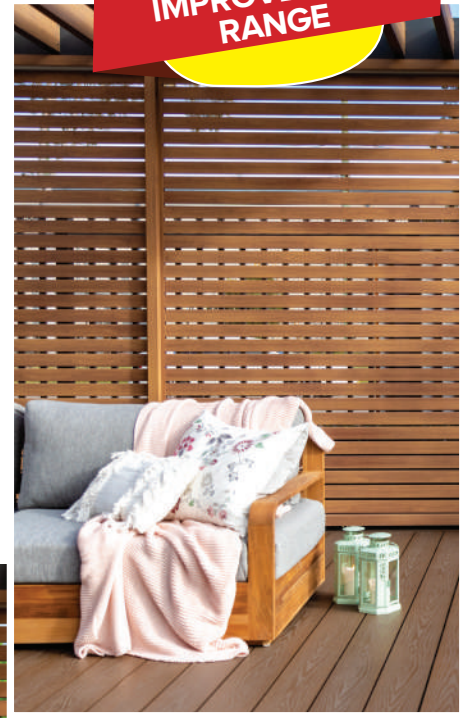

### Privacy Screen



Zammit Metal Roofing Products stocks aluminium slats  
ideal for privacy screens, available in mill finish or custom  
powder coating.

Stock length 6.5 meters

65mm x 16mm – 1.4mm thickness

#### Available accessories

\*\*20mm x 20mm slat side channel

- Stock length 6.5 meters

- available in mill finish or powder coated finish

\*\*20mm slat spacer



## Steel




CALL OR VISIT OUR  
WEBSITE TO VIEW

**HOME  
IMPROVEMENT  
RANGE**

Zammit Metal Roofing Products stocks a wide range of steel beams, posts, brackets, and accessories to suit. Available in galvanised or powder coated in a range of colours.

Ideal for pergola's & awning's, bearers & joists, & other applications.

### Powder Coated Steel Beam




Powder coated  
available  
to colour  
specification

#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------

### Galvanised Steel Beam



#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------

### Powder Coated Steel Post



#### Available Sizes

50mm x 50mm	60mm x 60mm	90mm x 90mm
-------------	-------------	-------------

### Galvanised Steel Post



#### Available Sizes

50mm x 50mm	60mm x 60mm	90mm x 90mm
-------------	-------------	-------------

### Powder Coated Steel Post Cap



#### Available Sizes

90mm x 90mm Domed Galvabond	50mm x 50mm Black Domed Plastic	60mm x 60mm Black Flat Plastic
-----------------------------------	---------------------------------------	--------------------------------------

### Plastic Post Cap



#### Available Sizes

100mm x 50mm
--------------

### 3mm Galvanised Rafter Bracket



## Steel

### Internal Post Base



#### Available Sizes

50mm x 50mm	60mm x 60mm	90mm x 90mm
-------------	-------------	-------------


### Collar Tie Bracket



#### Available Sizes

100mm x 50mm 15° Deg & 22.5° Deg	150mm x 50mm 15° Deg & 22.5°
-------------------------------------	---------------------------------

### Corner Bracket



#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------

### End Cap Bracket



#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------

### Suspension Bracket



#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------

### Pitching Bracket



#### Available Sizes

100mm x 50mm 22.5° Deg	150mm x 50mm 22.5° Deg	200mm x 50mm 22.5° Deg
100mm x 50mm 15° Deg	150mm x 50mm 15° Deg	200mm x 50mm 15° Deg

### Apex Bracket



#### Available Sizes

100mm x 50mm 22.5° Deg	150mm x 50mm 22.5° Deg	200mm x 50mm 22.5° Deg
100mm x 50mm 15° Deg	150mm x 50mm 15° Deg	200mm x 50mm 15° Deg

### Mitre End Cap



#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------




### 45° Deg End Cap



#### Available Sizes

100mm x 50mm	150mm x 50mm	200mm x 50mm
--------------	--------------	--------------

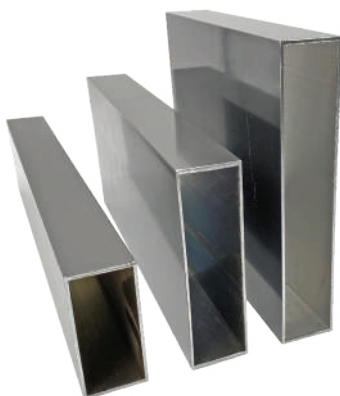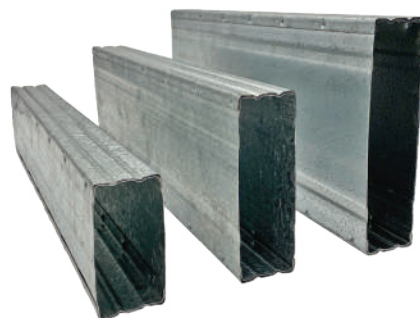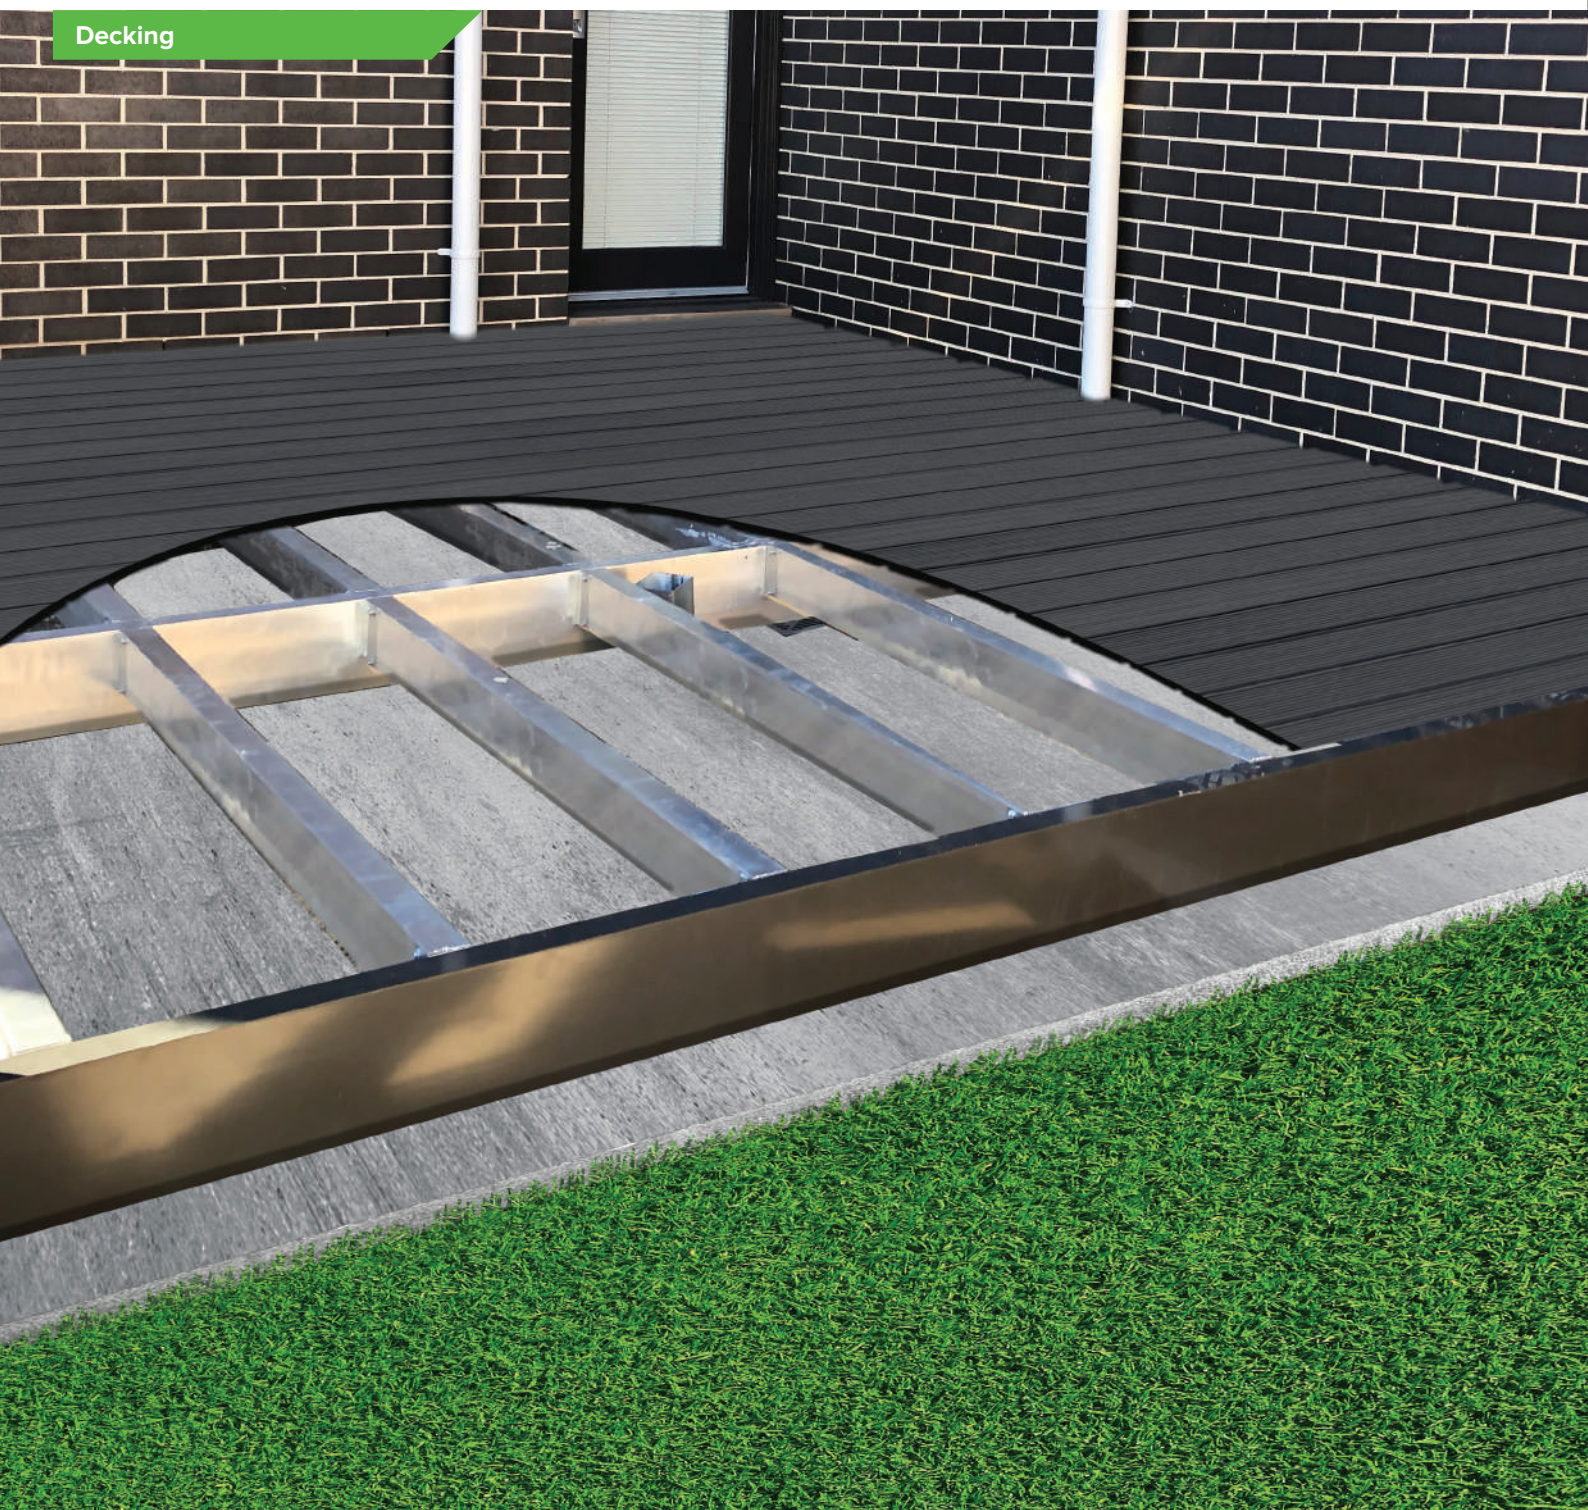

**Aluminium Beams - Mill Finish****Steel Posts****Galvanised Steel Beams****Decking**



# ACCESSORIES





## Insulation



## Fasteners & Screws



## Roof Safety Mesh



## Dektites



## Infill Strips - Deck Top



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Infill Strips - Deck Bottom



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Infill Strips - Corrie



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Infill Strips - Greca 180°



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Infill Strips - Spandek 180°



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Infill Strips - Kliplik 180°



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Infill Strips - Versiclad 180°



Sold separately, allow 1 foam  
Infill Strip per roof sheet

## Presstite Multi-Purpose Joint Filler 50mm x 25mm



Sold per pack (5) in 2 metre lengths (10 lineal metres)

## Fast Flash



## Measuring Tape




## Whirly Bird



## Instant Water Proofing



## 80mm PVC Downpipe

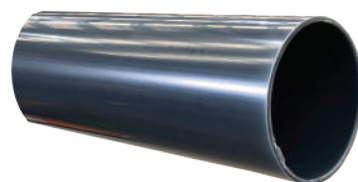

### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |

## PVC Pipe 92 Deg Bend



### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |

## PVC Pipe 112 Deg Bend



### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |


## PVC Pipe Socket



### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |

## Nozzle



### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |

## Astragals



### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |

## Pipe 80mm to 90mm Adaptor



### Colours Available in

- |  |                                     |
|--|-------------------------------------|
| <input type="checkbox"/> White         | <input type="checkbox"/> Paperbark  |
| <input type="checkbox"/> Classic Cream | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Monument      |                                     |



## Junction



### Colours Available in

<input type="checkbox"/> White	<input type="checkbox"/> Paperbark
<input type="checkbox"/> Classic Cream	<input type="checkbox"/> Slate Grey
<input type="checkbox"/> Monument	

## Pop Rivet Gun



## Nail Holder



## Nail Plugs



## 1/8 Pop Rivets



## 150g Touch-Up Paint Spray Cans



## Silicone Sealer & Silicone Gun



## Pro Snips - Left, Right & Straight Cut






## Copper Rainwater Head - Front and Back



Custom Trade Work





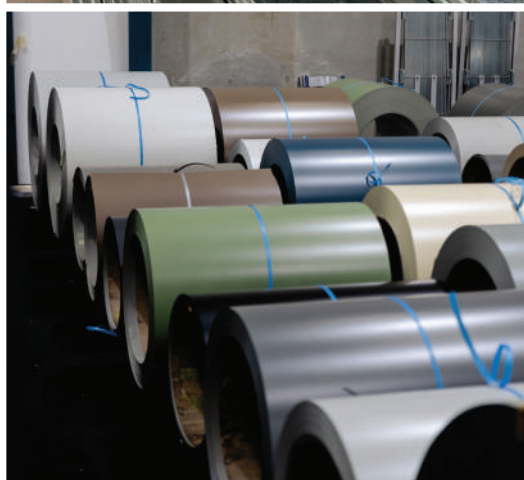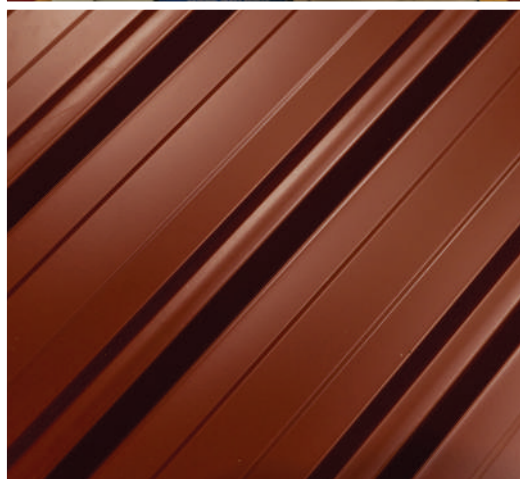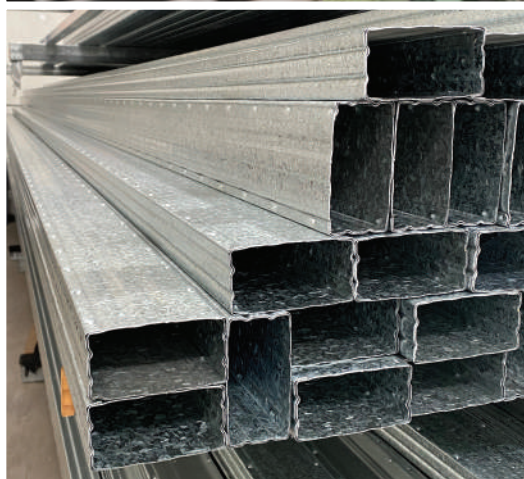





**ZAMMIT**  
METAL ROOFING PRODUCTS PTY LTD

82 Glendenning Road,  
Glendenning, NSW 2761, Australia

(02) 9675 5622  
sales@zammitroofing.com.au  
www.zammitroofing.com.au

 zammitroofing

 zammitroofing